

e-z-rect®

TRIM-LINE®

The Newest Generation of Boltless Shelving

Uses of Trim-line Shelving

Trim-line stationary shelving is E-Z-Rect's newest version of boltless shelving – the lightweight and economical design makes it perfect for light to medium weight storage.

- Garment and clothing storage
- Stationary and general office storage
- Record, file, and document storage
- Computer products and software
- Healthcare and medical products
- General retail merchandise
- Small parts and/or tools; auto parts

Benefits of Trim-line

Trim-line Shelving is built to last, not to replace. We create our shelving to be adaptable to your changing needs to grow as individual and industry needs evolve.

- Attractive design suitable for customer display areas and stockroom storage
- Manufactured with durable materials which allows for rigid, dependable use
- Economical and inexpensive to install and maintain
- Fast and simple installation requiring no special tools or skills for assembly
- Unobstructed access from both sides with no cross or sway braces in the way
- Simple design for rapid and flexible design changes and expansion



Retail Shoe Storage



Light Duty Warehouse Storage



Retail Garment Storage

Trim-Line Features

Trim-Line is flexible and adaptable to changing needs. The simple boltless design allows the addition, removal and adjustment of bays, including slopes, without disrupting the rest of the system. A fully customizable solution available in any combination of width, depth and height to meet specific needs and exacting requirements. Trim-Line is specifically designed for hand loading; machine loading is not recommended. Our project design team is pleased to offer layout and engineering assistance to meet your specific requirements.

- Simple boltless design without nuts, bolts or rivets
- Attractive finish allows for use in show rooms and stock rooms
- Cost effective; fully customizable to your unique needs
- Adjustable on 1" centers; flexibility to make changes on demand including slope
- Quick and easy to install; requires no additional tools or skills
- Conforms to AISI Standards; safety factor of 1.66 to 1
- Accessible, adaptable and saves valuable floor space
- Ideally suited for hand loading applications

Components and Accessories



◀ **Black Plastic Top or Bottom Cap**
Install Top Cap After Assembly



◀ **Shelf Clip**
4 Required Per Shelf Level
(2 Right Hand and 2 Left Hand)

◀ **TFCV Frame Connector**
Use with Particle Board Shelves or Use TFCL Connectors for Metal Shelves

◀ **TBC Frame Connector**
Use with Metal or Wood Shelves

◀ **TWB Frame Connector**
Use with Metal or Wood Shelves

◀ **Combination Tie Bar**
Fits TWB Frame Connectors for added strength



◀ **Post Splice**
Use for Extending Posts. Join the two post splices together to form a cross. Hammer into one post half way. Place top post over post splice and tap down carefully until posts meet.



◀ **Shelf Bar**
2 Required per Shelf Level.
Use with TBC or TWB Frame Connector or Shelf Clips

▲ **Shelf Clip**


◀ **Sectional Shelf (6")**
Use with Shelf Bar. Frame Connectors & Combination Tie Bar Required for Heavier Loads & Longer Spans.



◀ **Floor Plates**
Use to Protect Floors

Only Four Basic Components

- 1) Post
- 2) Post Connector
- 3) Frame Connector (Beam)
- 4) Shelf

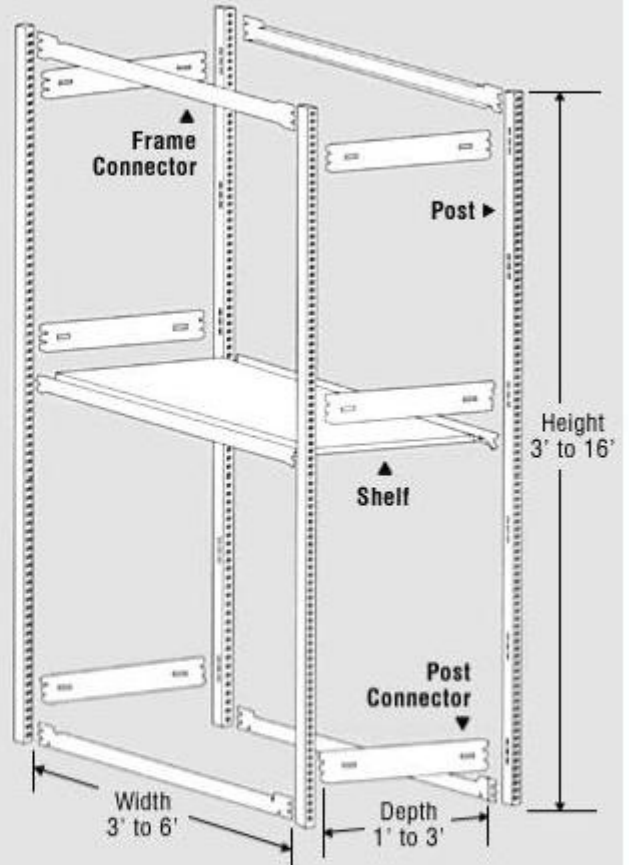

- Safe working loads up to 7000 lbs (3,175 kgs) per pair of post or bay
- Safety factor of 1.66 to 1 based on uniform static loading only
- Please contact the factory for capacities not shown in chart



Particle Board Shelf sits flush on connector, saving valuable shelf space and giving you a low profile shelf. Other shelf materials available.



Economical Shelf Clips provide quick and easy rearrangement of metal shelves.



Post Connectors installs and joins posts together to form a frame. Patented locking tab must be locked for safety.



Connector Locking Clip simply snaps in locking clip and connector cannot be dislodged by an upward force.



Three Hook Channel Frame connectors are strong and easily tapped into place to ensure a rigid and stable bay.



Garment Rods fit securely into garment rod supports creating hanging space within the shelving bay and can be positioned at any desired height.

Load Capacities	Max. Evenly Distributed Static Load Per Pair Of Connectors					
	36"	39 1/2"	48"	60"	66"	72"
	914 mm	1,003 mm	1,219 mm	1,524 mm	1,676 mm	1,829 mm
4 Shelf Clips	350 lb 159 kg	290 lb 132 kg	200 lb 91 kg	-	-	-
TFCV	390 lb 177 kg	350 lb 159 kg	290 lb 132 kg	-	-	-
TBC	600 lb 272 kg	550 lb 249 kg	500 lb 227 kg	-	-	-
TWB	-	-	-	570 lb 259 kg	470 lb 213 kg	395 lb 179 kg
TWB with one Combination Tie Bar	-	-	-	972 lb 441 kg	810 lb 368 kg	729 lb 331 kg