

OLYMPIC™ WIRE SHELVING GREEN EPOXY FINISH

- **Unique Design:** The open wire design of these carbon-steel shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile Construction:** Olympic wire shelving can change as quickly as your needs change.
- **Fast, Secure Assembly:** Posts have circular grooves at 1" (25mm) intervals. A tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Wires:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows use of maximum storage space of cube.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Finish:** Green epoxy finish with chromate substrate.
- **Posts:** Bolt levelers compensate for surface irregularities on stationary posts. Posts also available for mobile application.
- **Warranty:** Olympic green epoxy coated shelves and posts carry a 7 year limited warranty against rust and corrosion.



OLYMPIC

STORAGE COMPANY



Reliable space . . . economically.

OLYMPIC™ WIRE SHELVING GREEN EPOXY FINISH

Wire Shelves

Width/Length (in.) (mm)		Approx. Weight Per Shelf (lbs.) (kg)		Pack Quantity	Model No. Green Epoxy
14 x 24	355 x 610	6	2.7	4	J1424K
14 x 30	355 x 760	7	3.2	4	J1430K
14 x 36	355 x 914	8	3.6	4	J1436K
14 x 42	355 x 1066	9.5	4.3	4	J1442K
14 x 48	355 x 1219	10.5	4.7	4	J1448K
14 x 60	355 x 1524	14	6.3	2	J1460K
14 x 72	355 x 1829	17	7.7	2	J1472K
18 x 24	457 x 610	7	3.2	4	J1824K
18 x 30	457 x 760	8	3.6	4	J1830K
18 x 36	457 x 914	9.5	4.3	4	J1836K
18 x 42	457 x 1066	11	5	4	J1842K
18 x 48	457 x 1219	12	5.4	4	J1848K
18 x 54	457 x 1370	14.5	6.6	2	J1854K
18 x 60	457 x 1524	17	7.7	2	J1860K
18 x 72	457 x 1829	20	9.1	2	J1872K
21 x 24	530 x 610	8	3.6	4	J2124K
21 x 30	530 x 760	9	4.1	4	J2130K
21 x 36	530 x 914	11	5	4	J2136K
21 x 42	530 x 1066	12	5.4	4	J2142K
21 x 48	530 x 1219	14	6.4	4	J2148K
21 x 54	530 x 1370	16	7.3	2	J2154K
21 x 60	530 x 1524	18	8.2	2	J2160K
21 x 72	530 x 1829	24	10.9	2	J2172K
24 x 24	610 x 610	9	4.1	4	J2424K
24 x 30	610 x 760	11	5.0	4	J2430K
24 x 36	610 x 914	13	5.9	4	J2436K
24 x 42	610 x 1066	15	6.8	4	J2442K
24 x 48	610 x 1219	16	7.3	4	J2448K
24 x 54	610 x 1370	19	8.6	2	J2454K
24 x 60	610 x 1524	21	9.5	2	J2460K
24 x 72	610 x 1829	26	11.8	2	J2472K

Load Capacity:
Up to 48" (1220mm) Length = 800 lbs. (363kg), evenly distributed.
54"-72" (1829mm) Length = 800 lbs. (272kg), evenly distributed.

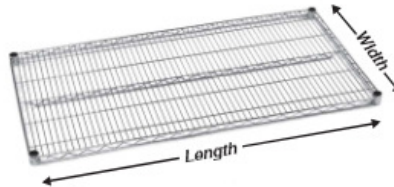

Split Sleeves

Posts

Approx. Weight Per Post (lbs.) (kg)	Pack Quantity	Height* Stationary Post (in.) (mm)	Model No. Stationary Post Green Epoxy	Height** Mobile Post (in.) (mm)	Model No. Mobile Post Green Epoxy			
1/2	0.3	4	7 1/2	191	J7K	6 3/4	171	J7LUK
1	0.5	4	14 1/2	370	J13K	13 3/4	349	J13LUK
2	0.9	4	34 1/2	875	J33K	34 3/4	857	J33LUK
3	1.4	4	54 7/16	1385	J54K	53 13/16	1366	J54LUK
3 1/2	1.6	4	62 7/16	1590	J63K	61 13/16	1570	J63LUK
4	1.8	4	74 7/16	1895	J74K	73 7/16	1873	J74LUK
5	2.3	4	86 7/16	2200	J86K	85 7/16	2181	J86LUK

*Height includes leveling bolt and cap.
**Mobile posts come without leveling bolt assembly and accommodate stem casters.
Height is for post only.



Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.